


WARP PREPARATION
准备设备

KFD-B

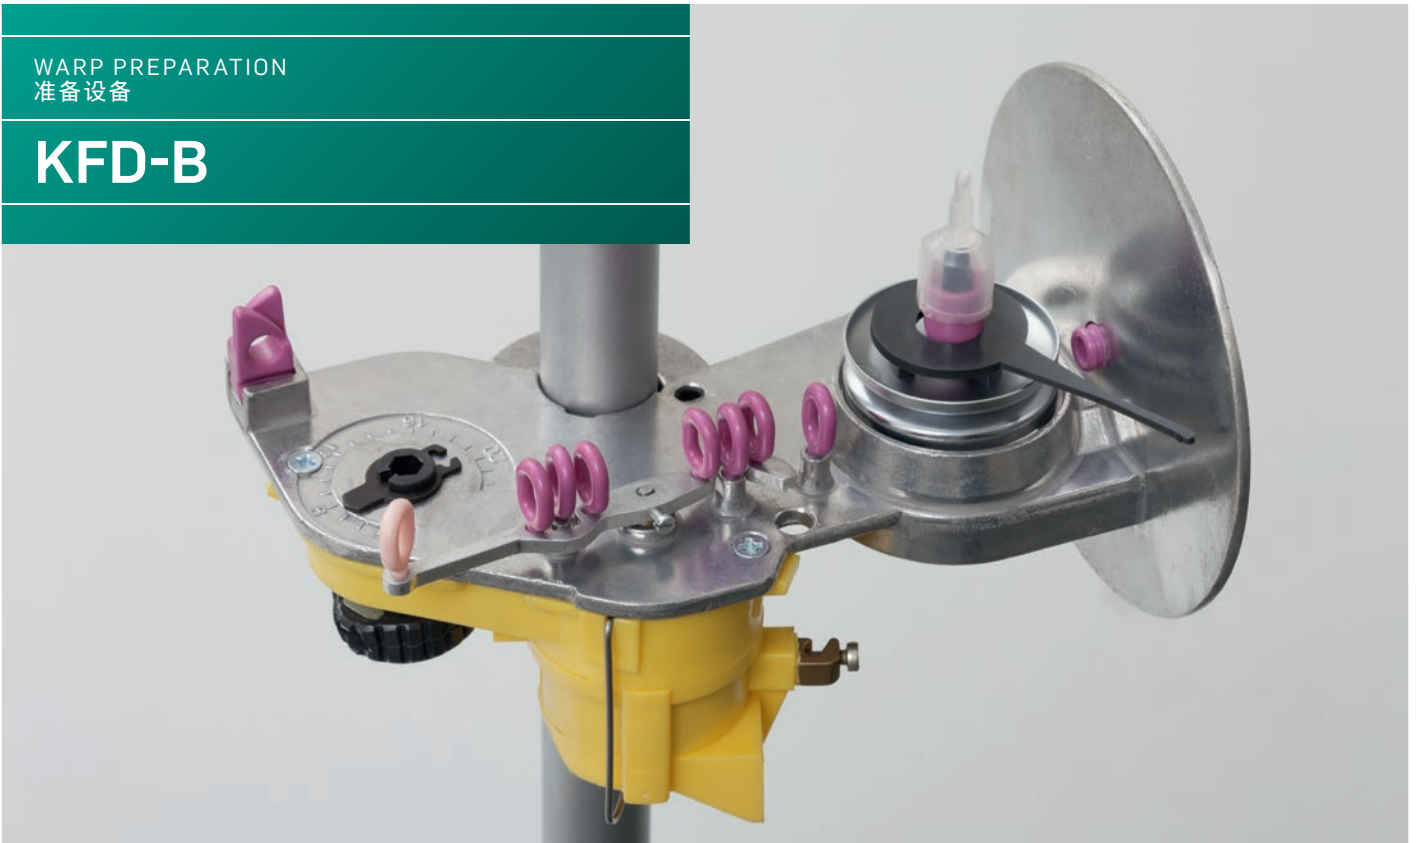

Compensating yarn tensioner KFD-B

补偿型纱线张力器KFD-B


Your benefit

- Easy handling
- Automatic compensation of the yarn tension
- Oil-damping system
- Completely wear-free due to ceramic elements
- Designed for high speeds
- Adjustment by rows or central adjustment


您的优势

- 操作简单
- 自动补偿型纱线张力器
- 油阻尼系统
- 陶瓷元件不易磨损
- 适合高速运转
- 通过张立柱或中央调节装置调节张力

Compensation of the yarn tension 纱线张力补偿

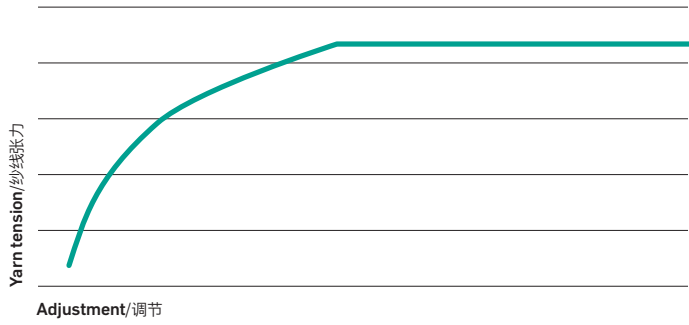

Regulating range depending on yarn tension 调节范围取决于纱线张力

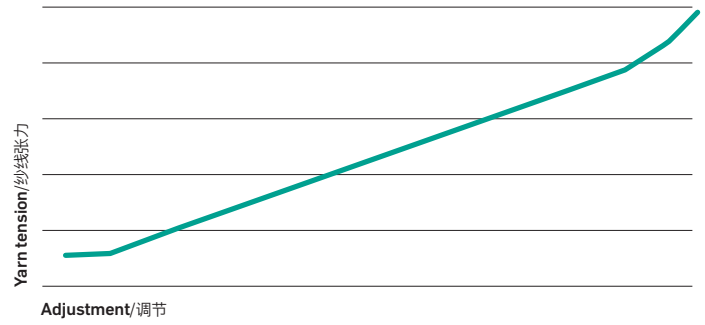

Product features

产品特点

- Compensating yarn tensioners always keep the same yarn tension, regardless of whether the draw-off speed is slow or fast, and regardless of whether the bobbin is full or almost empty
- 不论退绕速度的快慢和纱筒的大小, 纱线张力补偿装置总能保持恒定的纱线张力

Options

选配

- 6 cN up to 60 cN for cotton
- Yarn break detector
- Disc lifting system
- Central yarn tension readjustment
- Cleaning assistance by means of Air Jet
- 加工棉纱的能力, 提供6cN-60cN的张力控制
- 断纱检测器
- 张力盘提升系统
- 纱线张力中央调节
- 喷气式清洁装置

Technical facts

技术参数

Application 应用	for most of the filament yarns (optional also for spun yarns) 适用于大部分化纤长丝 (也可以选配加工短纤纱的能力)
Yarn tension 纱线张力	3 cN up to 24 cN 3 cN到24 cN
Yarn count 纱线细度	8 dtex up to 160 dtex 8 dtex到160 dtex
Speed 速度	up to 1200 m/min 高达1200米/分
Eyelets 导纱眼	made from aluminium oxide 由氧化铝制成