


WARP PREPARATION
准备设备

KFD 2

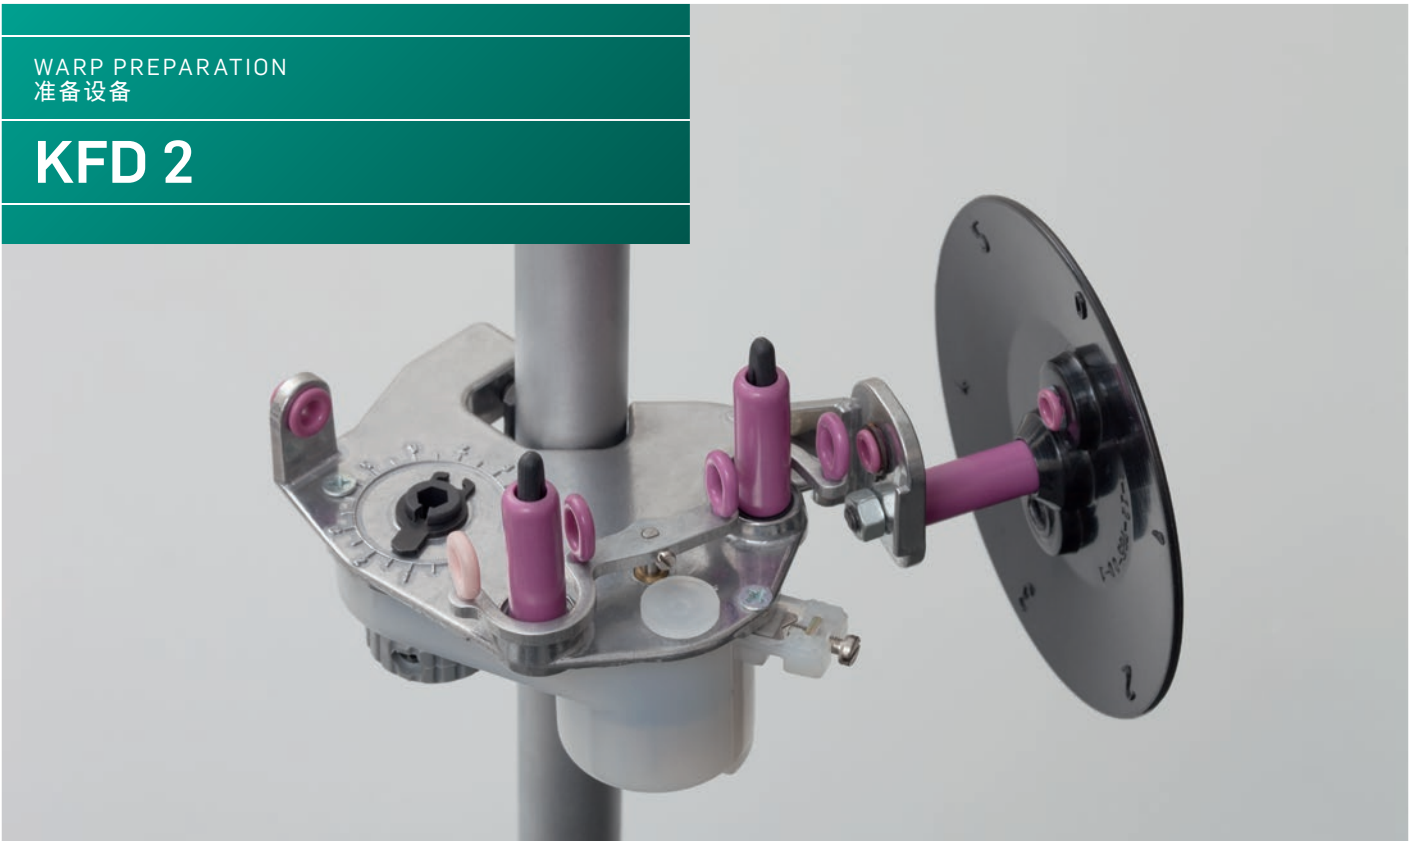

Compensating yarn tensioner KFD 2

补偿型纱线张力器KFD 2


Your benefit

- Easy handling
- Automatic compensation of the yarn tension
- Oil-damping system
- Completely wear-free due to ceramic elements
- Designed for high speeds
- Adjustment by rows or central adjustment


您的优势

- 操作简单
- 自动补偿纱线张力
- 油阻尼系统
- 陶瓷元件不易磨损
- 适应高速运行
- 逐排调节张力, 或通过中央调节装置调节张力

Compensation of the yarn tension 纱线张力补偿

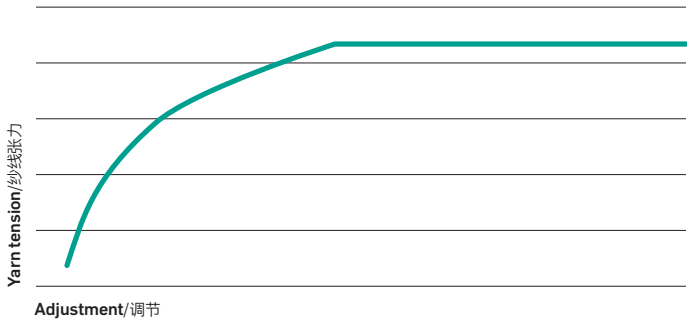

Regulating range depending on yarn tension 调节范围取决于纱线张力

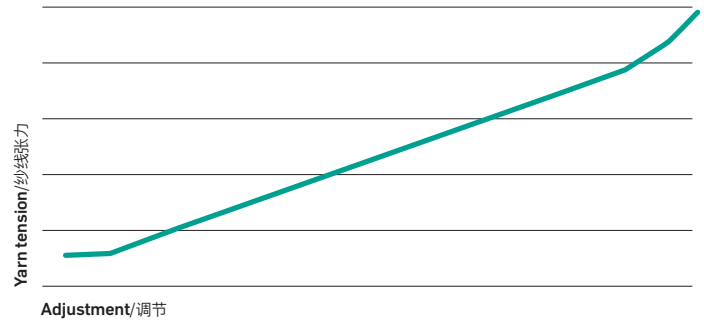

Product features

产品特点

- Compensating yarn tensioners always keep the same yarn tension, regardless of whether the draw-off speed is slow or fast, and regardless of whether the bobbin is full or almost empty
- 不论退绕速度的快慢和纱筒的大小, 纱线张力补偿装置总能保持恒定的纱线张力

Options

选配

- Yarn break detector
- Central yarn tension readjustment
- Cleaning assistance by means of Air Jet
- 断纱检测器
- 纱线张力中央调节
- 喷气式清洁装置

Technical facts

技术参数

Application 应用	for most of the sensitive yarns 适合大部分精细的纱线
Yarn tension 纱线张力	3 cN up to 12 cN 3 cN到12 cN
Yarn count 纱线细度	8 dtex up to 80 dtex 8 dtex到80 dtex
Speed 速度	up to 1200 m/min 高达1200米/分
Eyelets 导纱眼	made from aluminium oxide 由氧化铝制成